



## Syntilo 9930

Synthetic coolant

### Description

Castrol Syntilo™ 9930 is a synthetic coolant which has been developed for use as a general purpose grinding and light to medium duty machining fluid for ferrous metals. It forms a clear, stable solution in both hard and soft waters. Syntilo 9930 exhibits good anti-corrosion properties coupled with a high resistance to bacterial attack.

### Application

Syntilo 9930 is developed for surface, cylindrical, double disk and centreless grinding. This product is also recommended for milling, turning, boring and light drilling operation on cast iron and low carbon steel.

### Advantages


- Low foaming in all water conditions to ensure continuous grinding performance
- Inhibits microbial growth to extend fluid life in central systems and individual sumps
- Rejects tramp oil to the surface of the fluid for easy removal
- Chlorine, phenol and nitrite free for environmental compliance
- Maintains corrosion protection in hard water
- Settles chips quickly to prevent grinding wheel build-up and maintain a clean working environment

### Typical Physical Characteristics

	Test Method	Unit	Value
<b>Concentrate</b>			
Appearance	Visual	Visual	Transparent, yellow
Density	DIN 51757 ASTM D 1298	kg/m <sup>3</sup>	1.050 – 1.085
	Calculated	lbs/gal	8.89
Mineral oil content	Calculated	Vol. %	0
<b>Solution</b>			
Appearance	Visual	Visual	Transparent
pH (5%)	DIN 51361 ASTM E70-97		8.9 – 9.4
Factor refractometer			??

# Recommended Concentrations

Grinding: 4-8%  
Machining: 4-8%

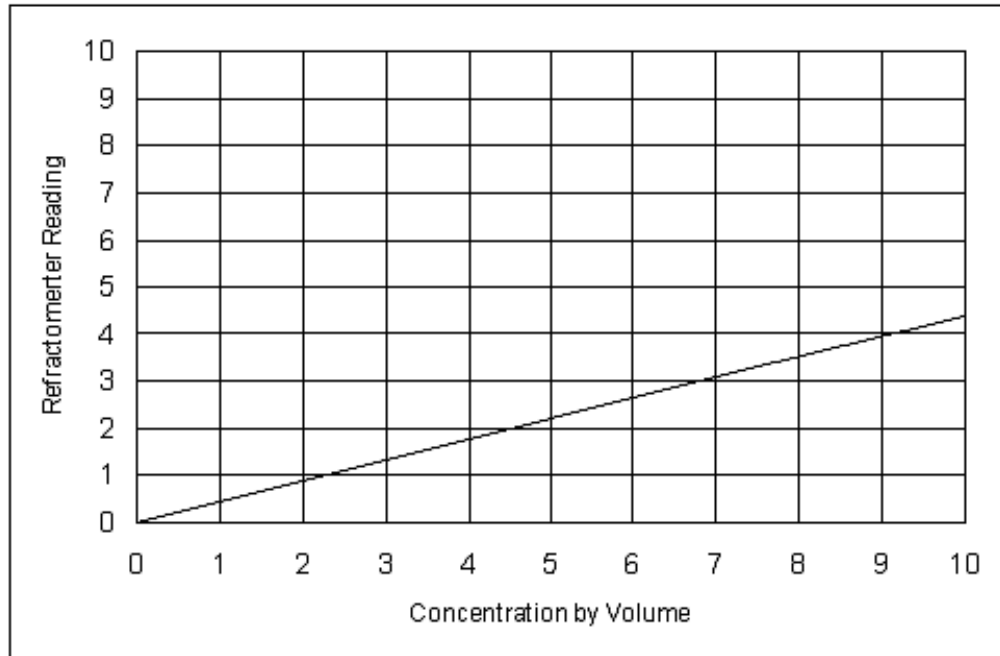

## Concentration Control

Concentration ( % )	Refractometer Reading
3.0	1.32
5.0	2.20
7.0	3.08
10.0	4.41

Syntilo 9930  
28 Jun 2013  
Castrol, the Castrol logo and related marks are trademarks of Castrol Limited, used under licence.

This data sheet and the information it contains is believed to be accurate as of the date of printing. However, no warranty or representation, express or implied, is made as to its accuracy or completeness. Data provided is based on standard tests under laboratory conditions and is given as a guide only. Users are advised to ensure that they refer to the latest version of this data sheet. It is the responsibility of the user to evaluate and use products safely, to assess suitability for the intended application and to comply with all applicable laws and regulations. Material Safety Data Sheets are available for all our products and should be referred to for appropriate information regarding storage, safe handling, and disposal of the product. Castrol India Limited shall not be responsible or liable for any damage or injury resulting from abnormal use of the product, from any failure to adhere to recommendations, from any failure to adhere to information regarding storage, safe handling, and disposal of the product or from hazards inherent in the nature of the product. All products, services and information supplied are provided under our standard conditions of sale. You should consult our local representative if you require any further information.

Castrol India Ltd Technopolis Knowledge Park PO Box. 19411, 1st Floor Mahakali Caves Road Mumbai - 400 093 India  
Toll Free: 1800 222100 / 1800 2098100, 022-27839800 Email: [customercare.India@castrol.com](mailto:customercare.India@castrol.com)  
[www.castrol.com/industrial](http://www.castrol.com/industrial)