



Grindex 10

Art.No. 1101-04

Description

Grindex 10 is a synthetic, water miscible, mineral oil free cutting fluid for grinding.

Range of application

Grindex 10 is designed for grinding cast iron and steel alloys. It is also suitable for machining glass and ceramic materials.

Product properties

Good rinsing behaviour	→
Excellent foam behaviour	→
Efficient corrosion protection	→
Good settling behaviour	→

Benefits

keeps grinding wheels and machines clean
suitable for high pressure and high wheel peripheral speeds
no corrosion even at low concentrations
grit and fines don't remain in suspension

Physical-chemical data

Concentrate

Colour	Yellowish, light brown
Mineral oil content	0%
Water content	40 %
Density at 20°C	1.12 g/cm ³
pH value	
Refractometer factor	

Solution

transparent, yellowish
8.7 – 9.9
1.6

Note

The product does not contain

Mineral oil, chlorine, nitrite, nitrite separators, formaldehyde, formaldehyde separators, triazine (HHT), boron, diethanolamine, NDELA, silicones, PCB, PCT, TCDD or other dioxin-containing substances.

Blaser Swisslube AG

CH-3415 Hasle-Rüegsau • Tel. 034 460 01 01 • Fax 034 460 01 00

v **Edufix Oy**
Panu Ranta
p. 050 377 7628
panu.ranta@edufix.fi


Blaser.
SWISSLUBE

Concentration of use



refractometer reading: 1.8 - 4.3%)

› contact the customer service of Blaser

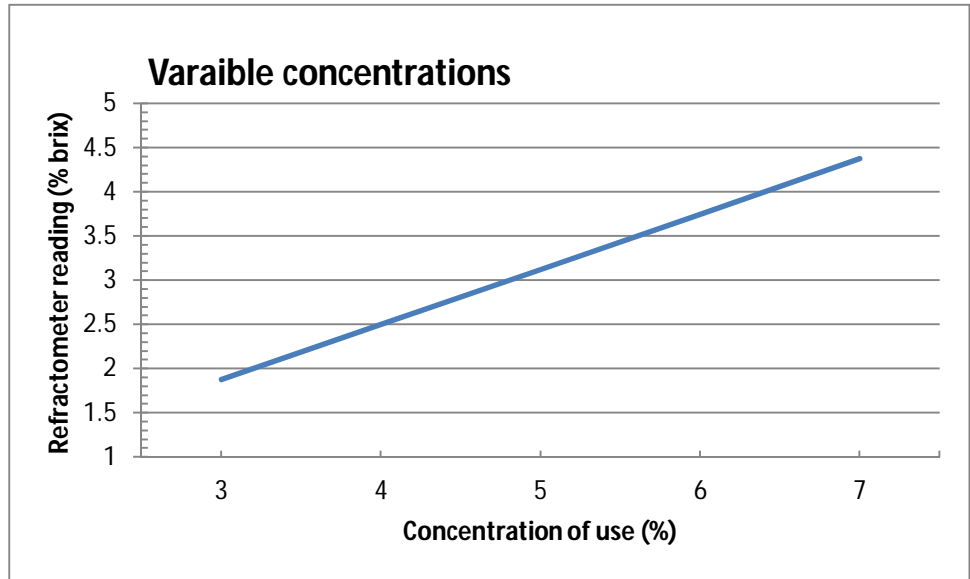

Information contained in this data sheet is based upon the properties and applications of use as known to us. However, generally no legal liability may be deducted from such information.
V06 // 16.09.2015

ISO 9001/14001 Reg.Nr. 11321

Blaser Swisslube AG

CH-3415 Hasle-Rüegsau • Tel. 034 460 01 01 • Fax 034 460 01 00

v **Edufix Oy**
Panu Ranta
p. 050 377 7628
panu.ranta@edufix.fi

